

**SOFT GRIP SCREWDRIVER SET (8pcs.)**

No.	TD798	▼kg	1	☒	10
Cross Soft Grip Screwdriver	No.1	D7P-1			
	No.2	D7P-2			
	No.3	D7P-3			
Flat Soft Grip Screwdriver	75	D7M-5			
	100	D7M-6			
	150	D7M-8			
Cross Soft Stubby Screwdriver	No.2	D9P-225			
Flat Soft Stubby Screwdriver	25	D9M-625			

- Elastomer used as grip materials ; lightweight, environment friendly, not sticky.
- The orange grip color indicates "cross".
- The green color of the grip indicates "flat".
- The shaft is through type and the tip is magnetized.
- The package can be used as a tray.
- Cr-V is used for shaft material.

No.	TD2798	▼kg	1	☒	10
Cross Soft Grip Screwdriver Through type	No.1	D7P2-1			
	No.2	D7P2-2			
	No.3	D7P2-3			
Flat Soft Grip Screwdriver Through type	75	D7M2-5			
	100	D7M2-6			
	150	D7M2-8			
Cross Soft Stubby Screwdriver	No.2	D9P-225			
Flat Soft Stubby Screwdriver	25	D9M-625			

- Elastomer used as grip materials ; lightweight, environment friendly, not sticky.
- The orange grip color indicates "cross".
- The green color of the grip indicates "flat".
- The shaft is through-type and the tip is magnetized.
- The package can be used as a tray.
- Cr-V is used for shaft material.
- \*The stubby screwdriver is a non-through type shaft.

● **SOFT GRIP SCREWDRIVER SET (8pcs.)**



**SOFT GRIP SCREWDRIVER GIFT SET (2pcs.)**

SOFT GRIP SCREWDRIVER GIFT SET (2pcs.)					
No.	TD902	Soft Stubby Screwdriver Set			
Cross Soft Stubby Screwdriver	No.2	D9P-225			
Flat Soft Stubby Screwdriver	25	D9M-625			
No.	TD702	Soft Grip Screwdriver Set			
Cross Soft Grip Screwdriver	No.2	D7P-2			
Flat Soft Grip Screwdriver	100	D7M-6			

- Cr-V is used for shaft material.
- **Best for gift-giving**
- Pleasing as a gift, Convenient set of two pieces.
- Operable in narrow spaces; good appearance.
- Necessities, popular at home and office.

● **SOFT GRIP SCREWDRIVER GIFT SET (2pcs.)**




**SOFT GRIP SCREWDRIVER**

No.	Type	d	D	L	ℓ	▼g	☒
<b>D7P2-1</b>	No.1	5.5	29	195	75	90	10
-110	No.1	5.5	29	220	100	95	10
-2	No.2	6.3	31	225	100	110	10
-215	No.2	6.3	31	275	150	120	10
-3	No.3	8	33	280	150	170	10

- Elastomer used as grip materials ; lightweight, environment friendly, not sticky.
- The orange grip color indicates "cross".
- The shaft is through type and the tip is magnetized.
- Cr-V is used for shaft material.

● **SOFT GRIP SCREWDRIVER**

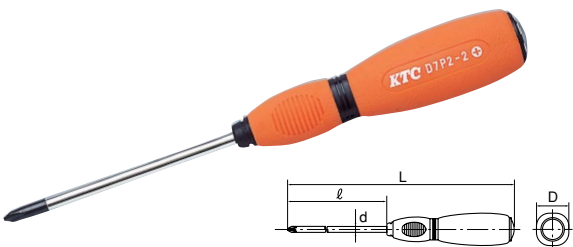

**SOFT GRIP SCREWDRIVER**

No.	a	b	d	D	L	ℓ	▼g	☒
<b>D7M2-5</b>	0.75	5.5	5.5	29	195	75	90	10
-510	0.75	5.5	5.5	29	220	100	95	10
-6	0.95	6	6.3	31	225	100	110	10
-615	0.95	6	6.3	31	275	150	120	10
-8	1.1	8	8	33	280	150	170	10

- The green color of the grip indicates "flat".
- The shaft is through type and the tip is magnetized.
- Cr-V is used for shaft material.

● **SOFT GRIP SCREWDRIVER**




**SOFT GRIP SCREWDRIVER**

No.	Type	d	D	L	ℓ	▼g	☒
<b>D7P-1</b>	No.1	5.5	29	200	75	80	10
-110	No.1	5.5	29	225	100	85	10
-115	No.1	5.5	29	275	150	95	10
-120	No.1	5.5	29	325	150	105	10
-2	No.2	6.3	31	230	100	105	10
-215	No.2	6.3	31	280	150	110	10
-220	No.2	6.3	31	330	200	130	10
-230	No.2	6.3	31	430	300	155	10
-3	No.3	8	33	285	150	160	10


- The shaft is non-through type and the tip is magnetized.
- Cr-V is used for shaft material.

● **SOFT GRIP SCREWDRIVER**

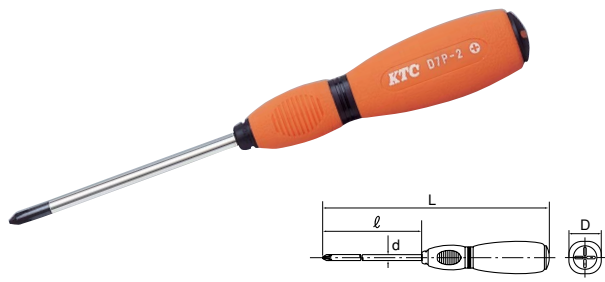

\*Please check the merchandise inventory for a product that is marked by before placing an order.

● SOFT GRIP SCREWDRIVER





SOFT GRIP SCREWDRIVER

No.	a	b	d	D	L	ℓ	▼g	📦
<b>D7M-5</b>	0.75	5.5	5.5	29	200	75	80	10
-510	0.75	5.5	5.5	29	225	100	85	10
-515	0.75	5.5	5.5	29	275	150	95	10
-520	0.75	5.5	5.5	29	325	200	105	10
-6	0.95	6	6.3	31	230	100	105	10
-615	0.95	6	6.3	31	280	150	115	10
-620	0.95	6	6.3	31	330	200	130	10
-630	0.95	6	6.3	31	430	300	155	10
-8	1.1	8	8	33	285	150	160	10

- The shaft is non-through type and the tip is magnetized.
- Cr-V is used for shaft material.

● SOFT GRIP SCREWDRIVER


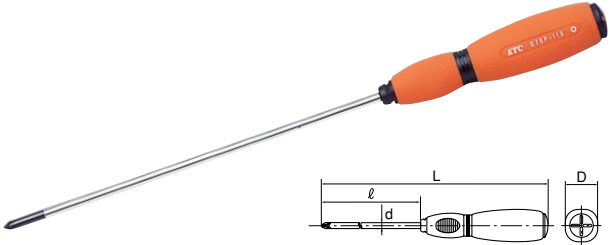


SOFT GRIP SCREWDRIVER

No.	Type	d	D	L	ℓ	▼g	📦
<b>D7SP-0075</b>	No.00	4	20	165	75	35	10
-0010	No.00	4	20	190	100	35	10
-075	No.0	4	20	165	75	35	10
-010	No.0	4	20	190	100	35	10
-175	No.1	4	20	165	75	35	10
-110	No.1	4	20	190	100	35	10
-115	No.1	4	20	240	150	40	10

- The shaft is thin and non-through type.
- Cr-V is used for shaft material.

● SOFT GRIP SCREWDRIVER

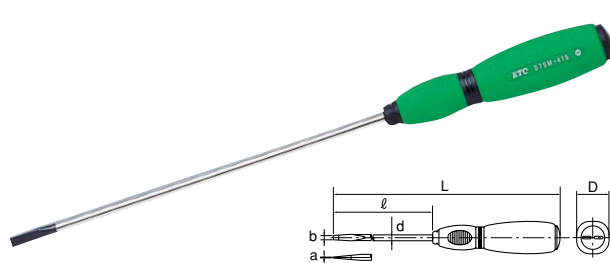


SOFT GRIP SCREWDRIVER

No.	a	b	d	D	L	ℓ	▼g	📦
<b>D7SM-450</b>	0.5	4	4	20	140	50	30	10
-475	0.5	4	4	20	165	75	35	10
-410	0.5	4	4	20	190	100	35	10
-412	0.5	4	4	20	215	125	40	10
-415	0.5	4	4	20	240	150	40	10
-420	0.5	4	4	20	290	200	45	10

- The shaft is thin and non-through type.
- Cr-V is used for shaft material.

● SOFT STUBBY SCREWDRIVER



SOFT STUBBY SCREWDRIVER

**Cross**


No.	Type	d	D	L	ℓ	▼g	📦
<b>D9P-125</b>	No.1	6	35	75	25	40	10
-225	No.2	6	35	75	25	40	10

**Flat**

No.	a	b	d	D	L	ℓ	▼g	📦
<b>D9M-625</b>	0.8	6	6	35	75	25	40	10

- The shaft is non-through type and the tip is magnetized.
- Cr-V is used for shaft material.

● LONG STUBBY SCREWDRIVER · SET (2pcs.)





LONG STUBBY SCREWDRIVER · SET (2pcs.)

<b>No. TD13P22</b>	▼g 110	📦 10
Long Stubby Screwdriver		D13P2-01, 02

No.	Type	D	d	L	ℓ	▼g	📦
<b>D13P2-01</b>	No.2	35	6	130	80	50	10
<b>02</b>	No.2	35	6	150	100	60	10

- Characteristics**
- As the screwdriver has a short grip and long shaft, the screwdriver can be used in places where the stubby screwdrivers and normal No. 2 screwdrivers cannot.
  - The shaft is hexagonal (width across flat 6 mm). Open end wrenches and adjustable wrenches can be used.
  - The tip is magnetized for convenience.
  - Two types of shaft lengths are available according to use.
  - Cr-V is used for shaft material.

● SOFT ROUND SCREWDRIVER

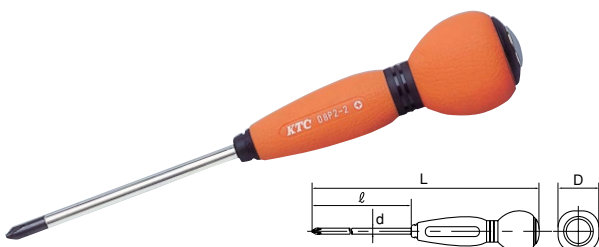


SOFT ROUND SCREWDRIVER

No.	Type	d	D	L	ℓ	▼g	📦
<b>D8P2-1</b>	No.1	5.5	32	170	75	65	10
-2	No.2	6.3	40	215	100	120	10
-215	No.2	6.3	40	265	150	130	10

- Round grip end, good for "push and turn" without palm pain.
- Elastomer used as grip materials ; lightweight, environment friendly, not sticky.
- The shaft is through type and the tip is magnetized.
- Cr-V is used for shaft material.

**SOFT ROUND SCREWDRIVER**

No.	a	b	d	D	L	ℓ	▼g	
D8M2-5	0.75	5.5	5.5	32	170	75	65	10
-6	0.95	6	6.3	40	215	100	120	10
-615	0.95	6	6.3	40	265	150	130	10




- The green color of the grip indicates "flat".
- The shaft is through type and the tip is magnetized.
- Cr-V is used for shaft material.

● SOFT ROUND SCREWDRIVER



**SOFT ROUND SCREWDRIVER**

No.	Type	d	D	L	ℓ	▼g	
D8P-1	No.1	5.5	32	170	75	55	10
-110	No.1	5.5	32	195	100	60	10
-115	No.1	5.5	32	245	150	70	10
-2	No.2	6.3	40	215	100	100	10
-215	No.2	6.3	40	265	150	110	10
-220	No.2	6.3	40	315	200	125	10




- The shaft is non-through type and the tip is magnetized.
- Cr-V is used for shaft material.

● SOFT ROUND SCREWDRIVER



**SOFT ROUND SCREWDRIVER**

No.	a	b	d	D	L	ℓ	▼g	
D8M-5	0.75	5.5	5.5	32	170	75	55	10
-510	0.75	5.5	5.5	32	195	100	60	10
-515	0.75	5.5	5.5	32	245	150	70	10
-6	0.95	6	6.3	40	215	100	100	10
-615	0.95	6	6.3	40	265	150	110	10
-620	0.95	6	6.3	40	315	200	125	10




- The shaft is non-through type and the tip is magnetized.
- Cr-V is used for shaft material.

● SOFT ROUND SCREWDRIVER




**PLASTIC GRIP SCREWDRIVER**

No.	Type	d	D	L	ℓ	▼g	
D10P2-1	No.1	5.5	29	190	75	80	10
-110	No.1	5.5	29	215	100	85	10
-2	No.2	6.3	31	220	100	100	10
-215	No.2	6.3	31	270	150	110	10
-3	No.3	8	33	275	150	160	10




- Solid touch for plastic grip. Made of environment friendly materials.
- The shaft is through type and the tip is magnetized.
- The orange color of the grip indicates "Cross".
- Cr-V is used for shaft material.

● PLASTIC GRIP SCREWDRIVER

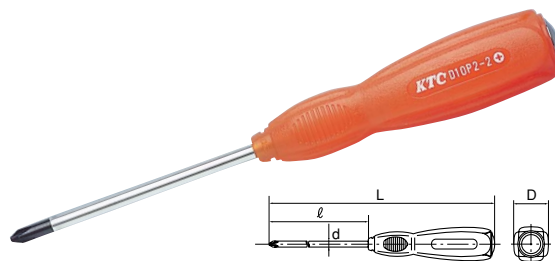


**PLASTIC GRIP SCREWDRIVER**

No.	a	b	d	D	L	ℓ	▼g	
D10M2-5	0.75	5.5	5.5	29	190	75	80	10
-510	0.75	5.5	5.5	29	215	100	85	10
-6	0.95	6	6.3	31	220	100	100	10
-615	0.95	6	6.3	31	270	150	110	10
-8	1.1	8	8	33	275	150	160	10




- The green color of the grip indicates "flat".
- The shaft is through type and the tip is magnetized.
- Cr-V is used for shaft material.

● PLASTIC GRIP SCREWDRIVER

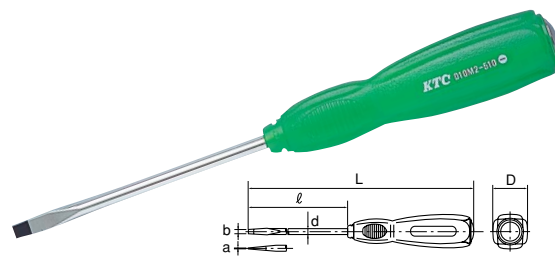


**PLASTIC GRIP SCREWDRIVER**

No.	Type	d	D	L	ℓ	▼g	
D10P-1	No.1	5.5	29	190	75	70	10
-110	No.1	5.5	29	215	100	75	10
-115	No.1	5.5	29	265	150	85	10
-120	No.1	5.5	29	315	200	95	10
-2	No.2	6.3	31	220	100	95	10
-215	No.2	6.3	31	270	150	105	10
-220	No.2	6.3	31	320	200	120	10
-3	No.3	8	33	275	150	150	10




- The shaft is through type and the tip is magnetized.
- Cr-V is used for shaft material.

● PLASTIC GRIP SCREWDRIVER

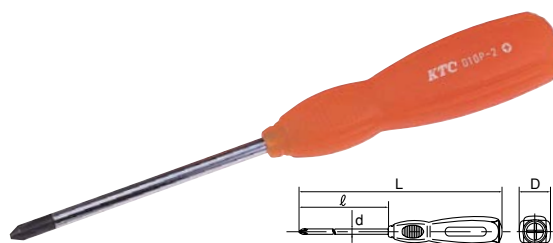

● PLASTIC GRIP SCREWDRIVER (FLAT)

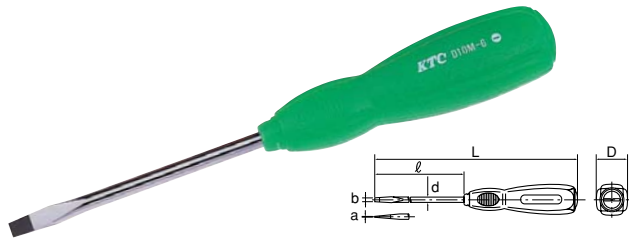


PLASTIC GRIP SCREWDRIVER

No.	a	b	d	D	L	ℓ	▼g	☒
<b>D10M-4</b>	0.6	4.5	5	29	165	50	65	10
-5	0.75	5.5	5.5	29	190	75	70	10
<b>-510</b>	0.75	5.5	5.5	29	215	100	75	10
<b>-515</b>	0.75	5.5	5.5	29	265	150	85	10
<b>-520</b>	0.75	5.5	5.5	29	315	200	95	10
<b>-6</b>	0.95	6	6.3	31	220	100	95	10
<b>-615</b>	0.95	6	6.3	31	270	150	105	10
<b>-620</b>	0.95	6	6.3	31	320	200	120	10
<b>-8</b>	1.1	8	8	33	275	150	150	10

• The shaft is through type and the tip is magnetized. • Cr-V is used for shaft material.

● PLASTIC GRIP SCREWDRIVER (CROSS)

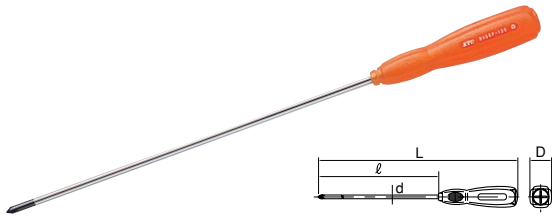


• The shaft is thin and non-through-type.

PLASTIC GRIP SCREWDRIVER

No.	Type	d	D	L	ℓ	▼g	☒
<b>D10SP-0075</b>	No.00	4	20	165	75	30	10
<b>-075</b>	No.0	4	20	165	75	30	10
<b>-010</b>	No.0	4	20	190	100	30	10
<b>-015</b>	No.0	4	20	240	150	35	10
<b>-020</b>	No.0	4	20	290	200	40	10
<b>-175</b>	No.1	4	20	165	75	30	10
<b>-110</b>	No.1	4	20	190	100	30	10
<b>-115</b>	No.1	4	20	240	150	35	10
<b>-120</b>	No.1	4	20	290	200	40	10
<b>-220</b>	No.2	4	20	290	200	40	10
<b>-225</b>	No.2	4	20	340	250	45	10

• Cr-V is used for shaft material.

● PLASTIC GRIP SCREWDRIVER (FLAT)

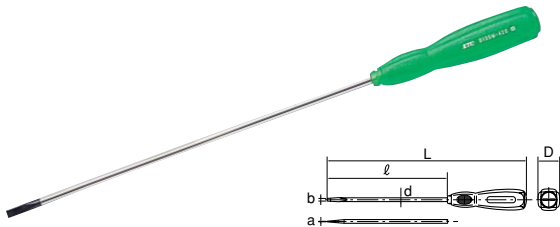


PLASTIC GRIP SCREWDRIVER

No.	a	b	d	D	L	ℓ	▼g	☒
<b>D10SM-450</b>	0.5	4	4	20	140	50	25	10
<b>-475</b>	0.5	4	4	20	165	75	30	10
<b>-410</b>	0.5	4	4	20	190	100	30	10
<b>-412</b>	0.5	4	4	20	215	125	35	10
<b>-415</b>	0.5	4	4	20	240	150	35	10
<b>-420</b>	0.5	4	4	20	290	200	40	10

• The shaft is thin and non-through type.  
• Cr-V is used for shaft material.

● PLASTIC GRIP STUBBY SCREWDRIVER (CROSS FLAT)

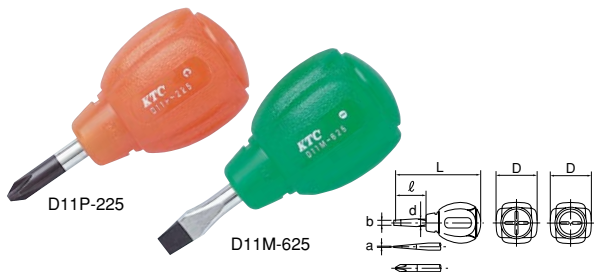

PLASTIC GRIP STUBBY SCREWDRIVER

CROSS


No.	Type	d	D	L	ℓ	▼g	☒
<b>D11P-125</b>	No.1	6	35	75	25	40	10
<b>-225</b>	No.2	6	35	75	25	40	10

FLAT

No.	a	b	d	D	L	ℓ	▼g	☒
<b>D11M-625</b>	0.8	6	6	35	75	25	40	10

• The shaft is non-through type and the tip is magnetized.  
• Cr-V is used for shaft material.

● WOODEN GRIP SCREWDRIVER

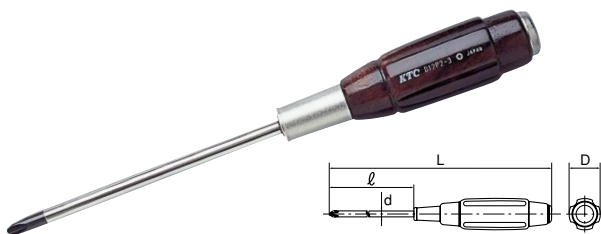

WOODEN GRIP SCREWDRIVER

No.	Type	d	D	L	ℓ	▼g	☒
<b>D12P2-1</b>	No.1	5.5	30	195	75	60	10
<b>-2</b>	No.2	6.3	32	230	100	120	10
<b>-215</b>	No.2	6.3	32	280	150	130	10
<b>-3</b>	No.3	8	35	290	150	200	10

• Palm-friendly native wood is used for grip.  
• The shaft is through type and the tip is magnetized.  
• Cr-V is used for shaft material.

● WOODEN GRIP SCREWDRIVER D.PAT



WOODEN GRIP SCREWDRIVER

No.	a	b	d	D	L	ℓ	▼g	☒
<b>D12M2-5</b>	0.75	5.5	5.5	30	195	75	60	10
<b>-6</b>	0.95	6	6.3	32	230	100	120	10
<b>-7</b>	0.95	7	7	35	265	125	180	10
<b>-8</b>	1.1	8	8	35	290	150	200	10

• Palm-friendly native wood is used for grip.  
• The shaft is through type and the tip is magnetized.  
• Cr-V is used for shaft material.